

























TECHNICAL FILE

 Modello - Model - Model - Gerätetyp			
		Code Production	AF64X1510-DM
			
	Descrizione - Description - Description - Beschreibung	60x40 TN	
	Range	-3°C +35°C	
	Funzionamento - Operating Mode - Mode de fonctionnement - Betriebsmodus S = Statico - Static - Statique - Stille Kühlung V = Ventilato - Ventilated - Ventilé - Umluftkühlung	V	
	Capacità lorda - Gross Capacity - Capacité brute - Bruttovolumen	I	600
	N° cicli manuali - N° manual cycles - N° cycles manuels - N° manuelle Zyklen	3	
	N° programmi - N° programs - N° programmes - N° Programme	100	
	Dimensioni esterne - External Dimension - Dimensions externes - ußenabmessungen		
	Lunghezza - Width - Largeur - Breite	mm	750
	Profondità / con porte aperte - Depth / with open doors Profondeur avec portes ouverte - Tiefe/mit geöffneter Tü	mm	820 / 1530
	Altezza - Height - Hauteur - Höhe	mm	2025
	Dimensioni interne - Internal Dimension - Dimensions internes - Innenabmessungen		
	Lunghezza - Width - Largeur - Breite	mm	600
	Profondità - Depth - Profondeur - Tiefe	mm	670
	Altezza - Height - Hauteur - Höhe	mm	1440
	Porte - Doors - Portes - Türen	1, Full	
	Dotazione Standard - Standard Equipment - Equipement standard - Standardausstattung	20 coppie guide - 20 pairs of slides 20 glissieres - 20 paar führungen	
	Capacità teglie - Pans capacity MAX - Capacité bacs - Backblechekapazität	max	n°26 60x40
	Interasse teglie - Pans pitch - Pas des bacs - Backblecheabsatz	mm	50
	Luce interna - Internal light - Eclairage intérieure - Innerbeleuchtung		
	Serratura - Lock - Serrure - Schloss		
	Sbrinamento - Defrost - Dégivrages - Abtauen		
	Type	Hot Gas	
	N° Defrost in 24 hrs.	6	
	Evaporazione acqua sbrinamento - Evaporation of defrost water Evaporation eau de dégivrage - Tauwasserverdunstung	Manual	
	Compressor		
	Model	EMT6170Z	
	Potenza - Power - Puissance - Leistung	HP	1/4
	T° Evaporation	°C	-10
	Potenza frigorifera - Refrigerant Power - Puissance frigorifique - Kälteleistung	watt	450
	Refrigerante - Refrigerant type - Réfrigérant type - Kältemitteltyp	R134a / 1430	
	Quantità di refrigerante - Refrigerant quantity - Quantité de réfrigérant - Kältemittelmenge	gr	250
	Classe Climatica - Climate Class - Classe Climatique - Klima Classe	5 40°C-40%	
	Potenza Sistemi Riscaldanti - Heating Power	watt	600
	Potenza Generatore Vapore - Steam generator power	watt	600
	Potenza assorbita REFRIGERAZIONE - Power - Puissance - Leistung	watt	380W / 3,8 A max
	Tensione alimentazione - Supply Voltage - Tension d'alimentation - Anschlussspannung	V	230V~ 50Hz
	Noise Level	dbA	51
	Peso Netto - Net weight - Poids net - Netto Gewicht	kg	140

 = Dotazione di serie - Standard equipment - Dotation standard - Serien Ausstattung  =Optional

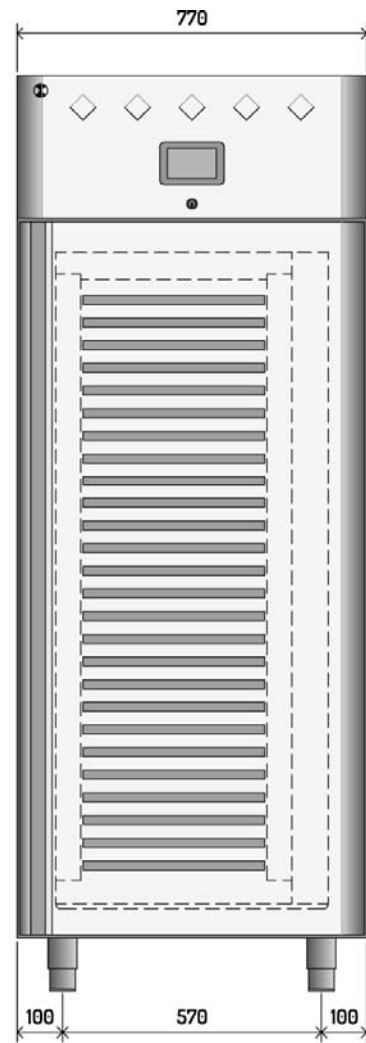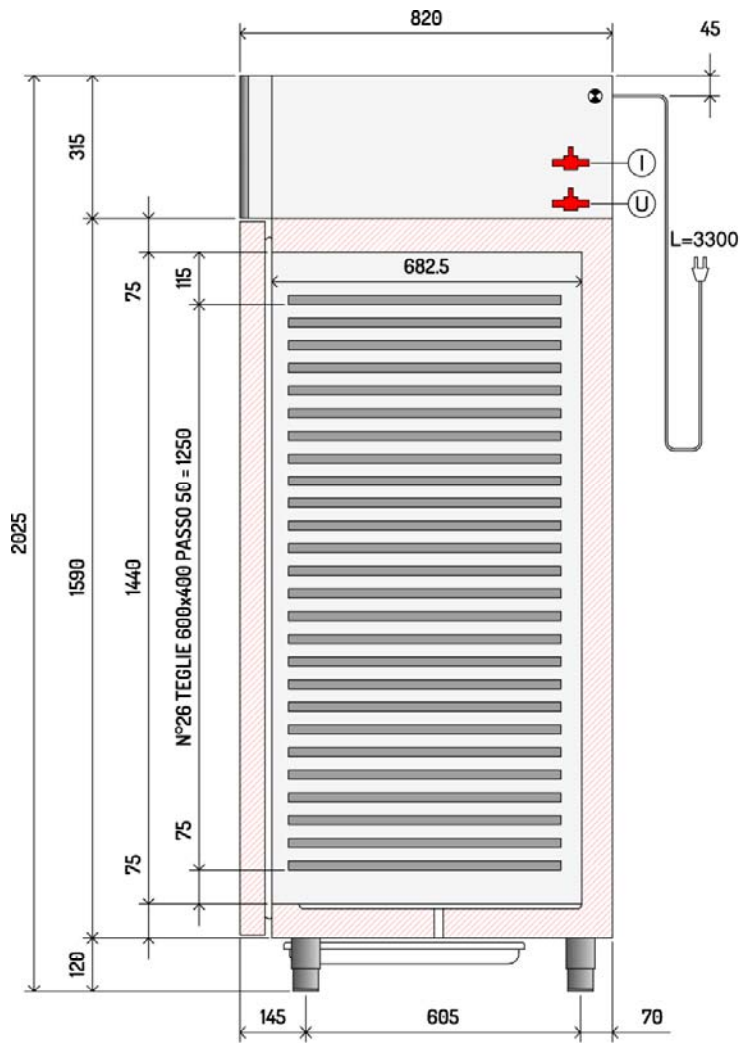

I

Ingresso acqua
Water Inlet
d'entrée d'eau
Wasserzulauf
Ø3/4"

(U) = SCARICO ACQUA (Ø 3/4")

U

Ingresso acqua
Water Outlet
sortie d'eau
Wasseraustritt
Ø3/4"

