


















 Modello - Model - Model - Gerätetyp - Modelo		ABOG5003	ABOG5002	ABOG5001	ABOG5021	ABOG5019	ABOG5018
							
							
 Descrizione - Description Description - Beschreibung - Descripción		5T 1/1 700			5T 1/1 800		
 Tipo di teglie - Trays type Type de plateaux - Blechetyp - Tipo de fuentes		GN 1/1			600x400		
Capacità Massima Max load capacity Capacité maximale Fassungsvermögen - Número máximo		N°	Teglie H=65 - Trays H=65 6 Plateaux H=65 - Bleche H=65 fuentes H=65		9		
Interasse griglie - Grids pitch Pas des grilles - Gitterabsatz - Intereje fuentes		mm	75		50		
 Ciclo Positivo - Positive cycle Cycle positif - Positiver Zyklus (+90° ... +3°)		kg	20		20		
Ciclo Negativo - Negative cycle Cycle negatif - Negativer Zyklus (+90° ...-18°)		kg	12		12		
 Dimensioni esterne - External Dimension Dimensions externes - Außenabmessungen - Dimensiones externas							
Lunghezza - Width - Largeur - Breite - Anchura		mm	1242		1242		
Profondità / con porte aperte - Depth / with open doors Profondeur avec portes ouverte Tiefe/mit geöffnetem Tür - Profundidad / con puerta abierta		mm	680/1445		750/1545		
Altezza - Height - Hauteur - Höhe - Altura		mm	860		860		
 Dimensioni interne - Internal Dimension Dimensions internes - Innenabmessungen - Dimensiones internas							
Lunghezza - Width - Largeur - Breite - Anchura		mm	664		664		
Profondità - Depth Profondeur - Tiefe - Profundidad		mm	350		420		
Altezza - Height - Hauteur - Höhe		mm	540		540		
 Sbrinamento - Defrost - Dégivrage - Abtauen - Descongelación		Manuale a ventilazione - Manual air defrosting Manuelle à ventilation - Umluftabtauung - Manual con ventilación					
Evaporazione acqua sbrinamento - Evaporation of defrost water Evaporation eau de dégivrage - Tauwasser verdunstung - Evaporación agua de condensación		Manuale - Manual Manuelle - Handentleerung - Manual					
 Compressor							
Model		NT2180GK		NT2180GK			
Potenza - Power - Puissance - Leistung		HP	1		1		
T° Evaporation		°C	-25		-25		
Potenza frigorifera - Refrigerant Power Puissance frigorifique - Kälteleistung		watt	950		950		
 Refrigerante - Refrigerant type Réfrigérant type - Kältemitteltyp - Refriante		R404A		R404A			
Quantità di refrigerante - Refrigerant quantity Quantité de réfrigérant - Kältemittelmenge		gr	1000		1000		
 Potenza assorbita - Total Power Puissance - Leistung - Potencia		W - A	1050 - 5		1050 - 5		
Tensione alimentazione - Supply Voltage Tension d'alimentation - Anschlussspannung - Alimentación		V	230V~ 50Hz		230V~ 50Hz		
 Peso Netto - Net weight Poids net - Netto Gewicht - peso neto		kg	125 (140)		135		

PA

**SCHEDA ALLACCIAMENTI - CONNECTION CARD – ANSCHLUSSSCHEMA
FICHE DES RACCORDEMENTS- FICHA DE ENLACES**




←	Scarico acqua
	Water Drain
	Vidage Eau
	Wasserabfluss
	Evacuacion Agua

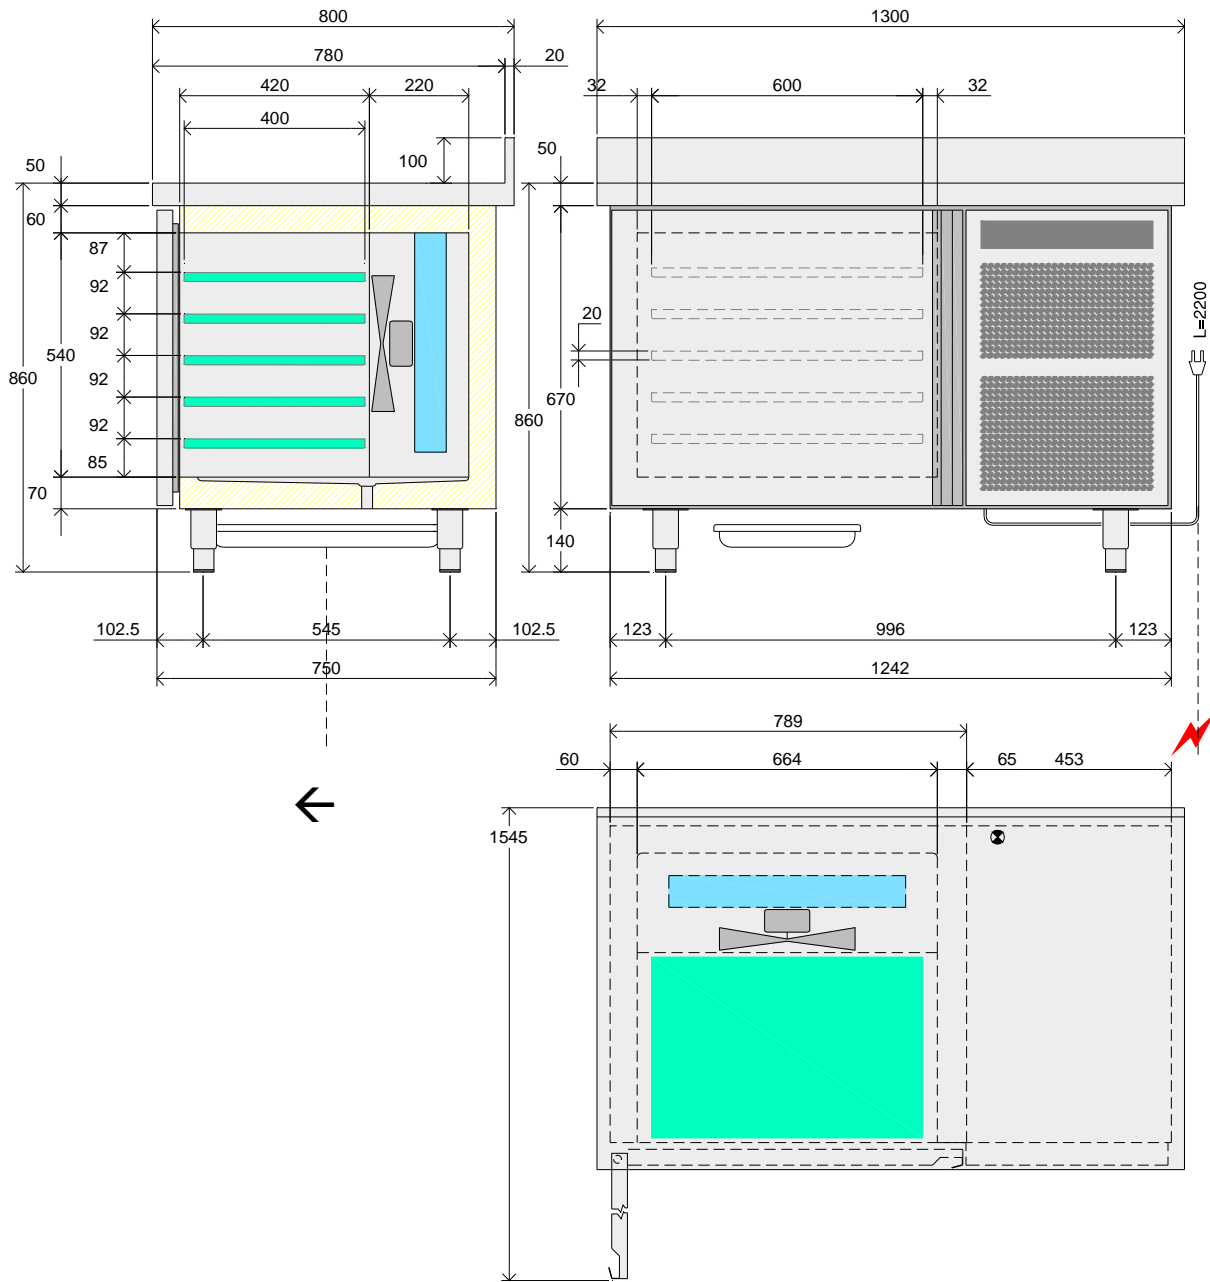⚡	Allacciamento Elettrico
	Electric Connection
	Branchement Electrique
	Elektroanschluss
	Conexiòn elètrica

GN

**SCHEDA ALLACCIAMENTI - CONNECTION CARD - ANSCHLUSSSCHEMA
FICHE DES RACCORDEMENTS- FICHA DE ENLACES**

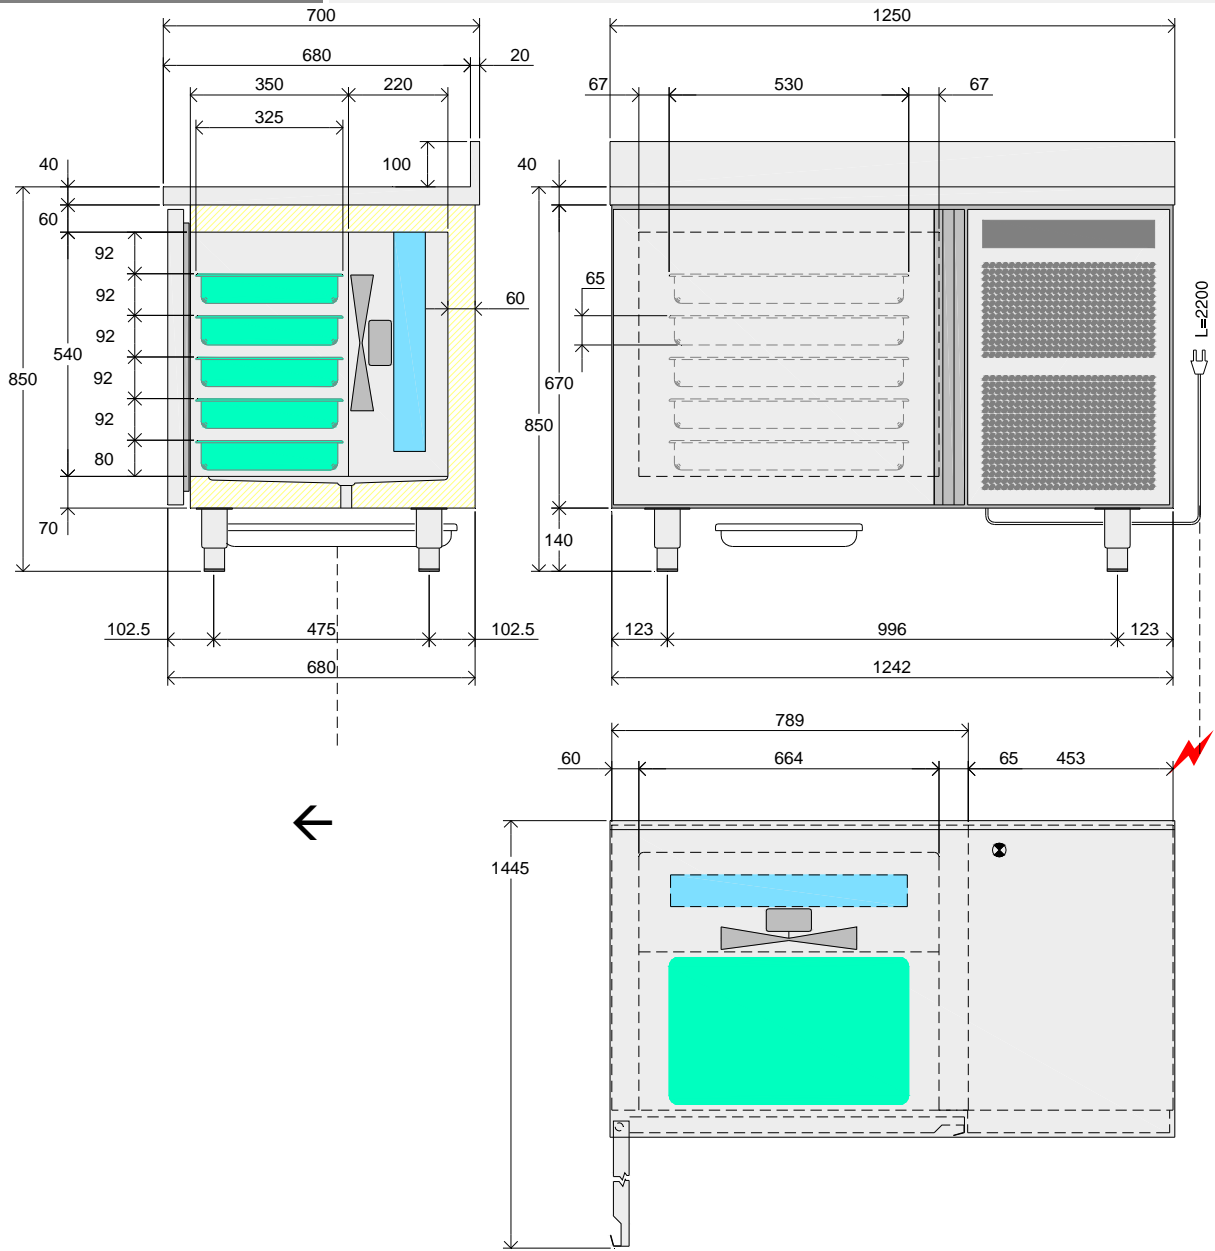

←	Scarico acqua
	Water Drain
	Vidage Eau
	Wasserabfluss
	Evacuacion Agua

⚡	Allacciamento Elettrico
	Electric Connection
	Branchement Electrique
	Elektroanschluss
	Conexiòn elètrica

SCHEDA ALLACCIAMENTI - CONNECTION CARD - ANSCHLUSSSCHEMA
FICHE DES RACCORDEMENTS- FICHA DE ENLACES

